

# ANAMILLING




## SEMI AUTOMATIC BAGGING UNIT MODEL: APPM

Yarı otomatik paketleme ünitesi  
Station d'ensachage  
Embolsadora de boca abierta




[www.anamilling.com](http://www.anamilling.com)

### SINGLE WEIGHING SINGLE STATION PACKER (FLOUR) 10 – 25 kg

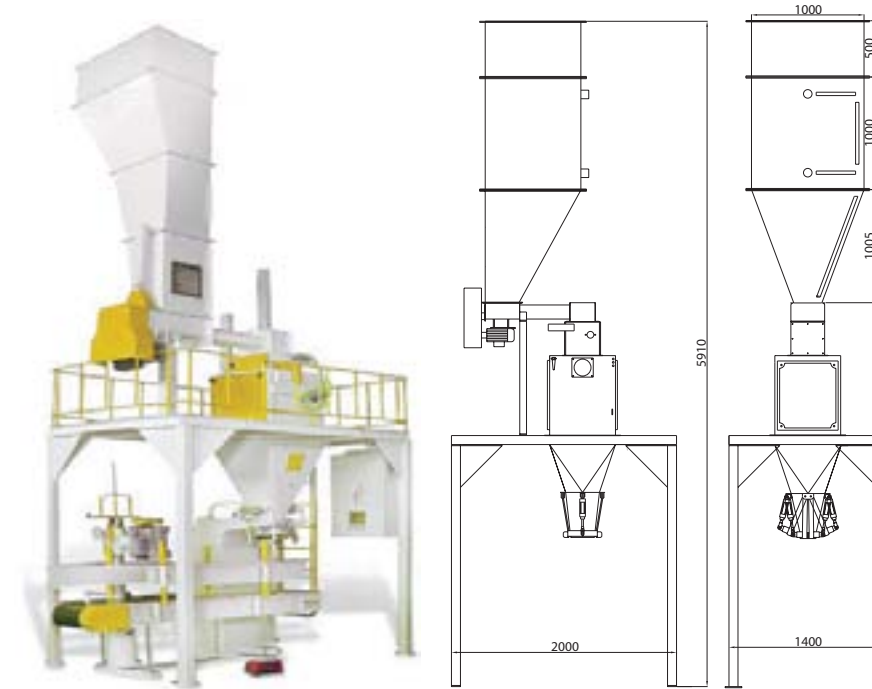


MODEL	APPM-F 10/25-S
Packing surge hopper capacity (liter)	1683
Output capacity (kg/h)	3500 – 7500
Electricity consumption (kW/h)	4,61
Sensitivity	0,001 – 0,003
Pan of balance capacity (liter)	50
Aeration (m <sup>3</sup> )	6 (0,01 negative pressure)
Weighing range (kg)	10 – 25
Weighing per hour (10-25-50) kg	350 – 300 sacks

### SINGLE WEIGHING SINGLE STATION PACKER (FLOUR) 25 – 50 kg

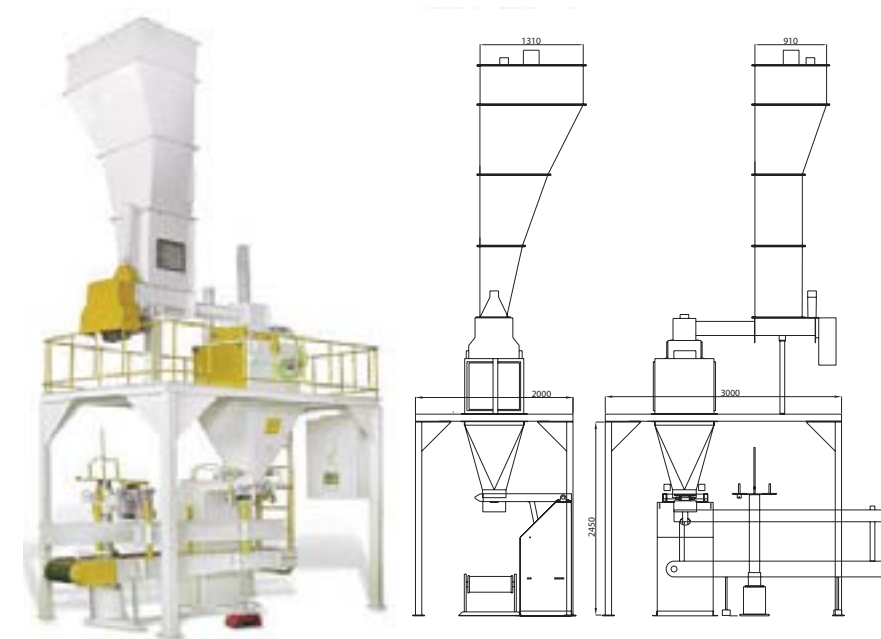


MODEL	APPM-F 25/50-S
Packing surge hopper capacity (liter)	1953
Output capacity (kg/h)	8750 – 15000
Electricity consumption (kW/h)	6.5
Sensitivity	0,001 – 0,003
Pan of balance capacity (liter)	100
Aeration (m <sup>3</sup> )	6 (0,01 negative pressure)
Weighing range (kg)	25 - 50
Weighing per hour (10-25-50) kg	350 – 300 sacks

### DOUBLE WEIGHING SINGLE STATION PACKER (FLOUR) 10 – 25 kg

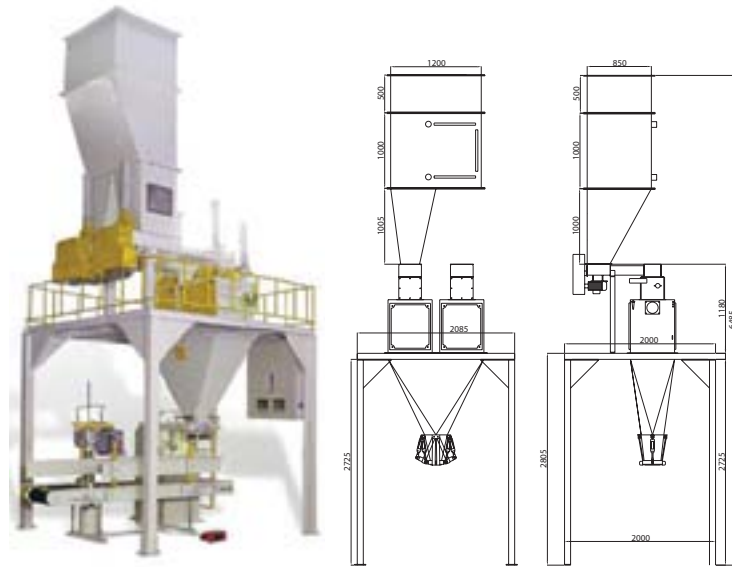


MODEL	APPM-F 10/25-D
Packing surge hopper capacity (liter)	2053
Output capacity (kg/h)	3500 – 12500
Electricity consumption (kW/h)	5.9
Sensitivity	0,001 – 0,003
Pan of balance capacity (liter)	2 x 50
Aeration (m <sup>3</sup> )	12 (0,01 negative pressure)
Weighing range (kg)	10 – 25
Weighing per hour (10-25-50) kg	550-500 sacks

### SINGLE WEIGHING SINGLE STATION BRAN PACKER 15 – 40 kg

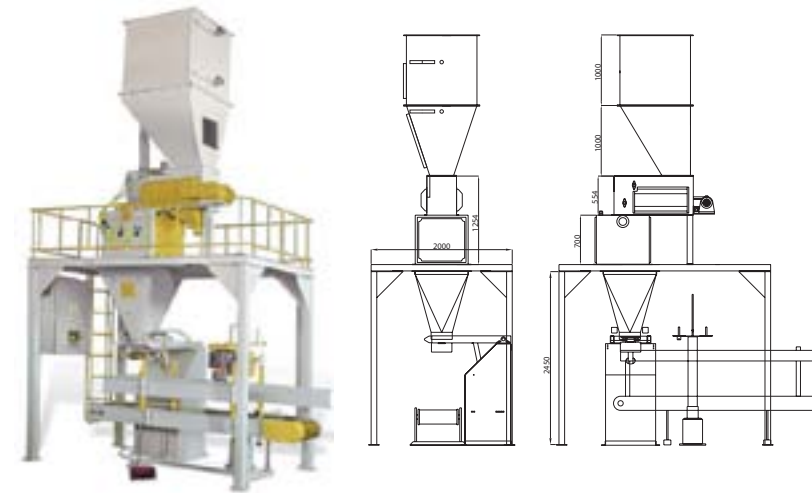


MODEL	APPM-B 15/40-S
Packing surge hopper capacity (liter)	1502
Output capacity (kg/h)	5250 – 12000
Electricity consumption (kW/h)	3.55
Sensitivity	0,001 – 0,003
Pan of balance capacity (liter)	110
Aeration (m <sup>3</sup> )	6 (0,01 negative pressure)
Weighing range (kg)	15 – 40
Weighing per hour (15-40) kg	350 – 300 sacks

### DOUBLE WEIGHING SINGLE STATION PACKER (FLOUR) 25 – 50 kg

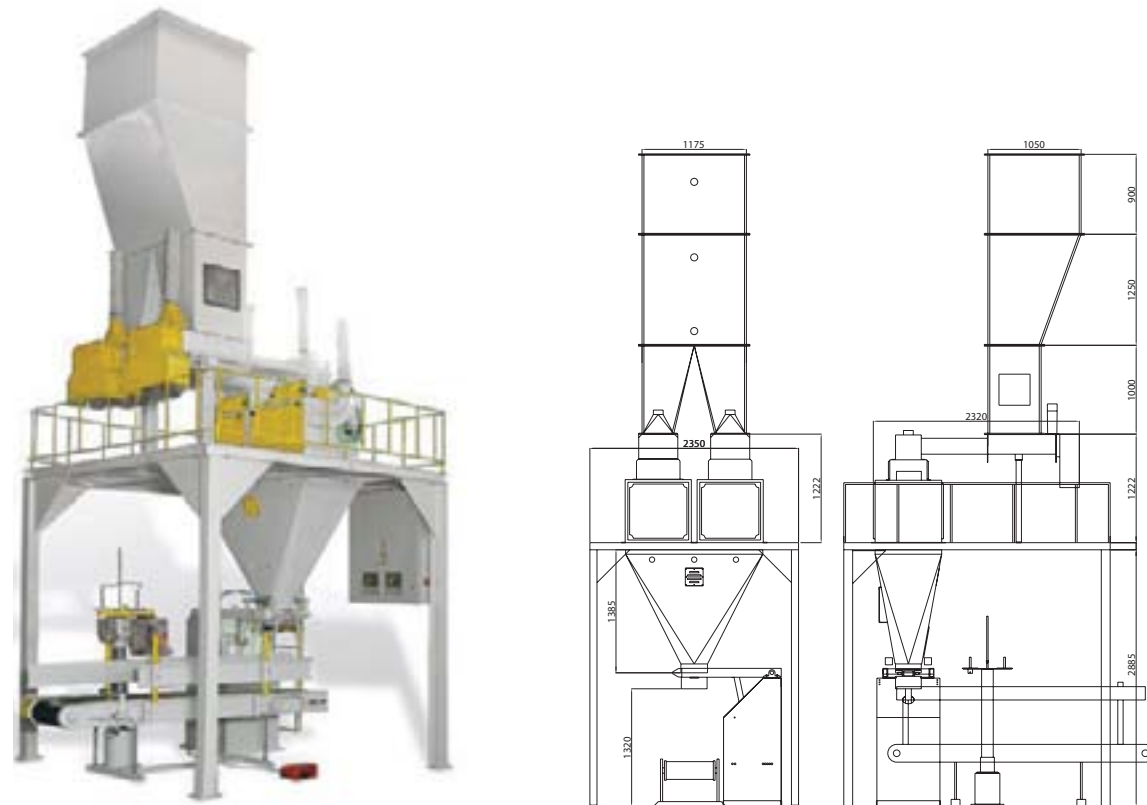

### DOUBLE WEIGHING SINGLE STATION BRAN PACKER 15 – 40 kg

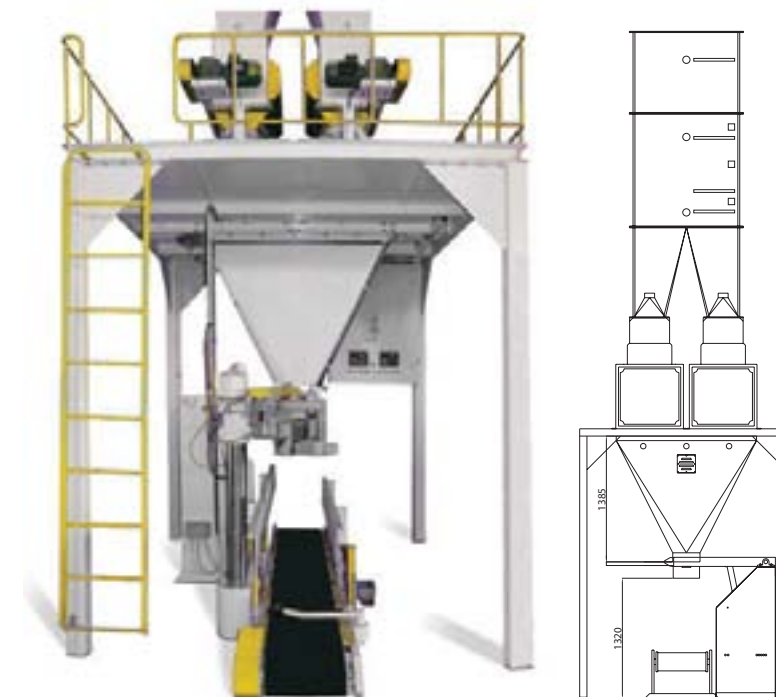

MODEL	APPM-B 15/40-D
Packing surge hopper capacity (liter)	2531
Output capacity (kg/h)	8200 – 20000
Electricity consumption (kW/h)	5.9
Sensitivity	0,001 – 0,003
Pan of balance capacity (liter)	2 x 110
Aeration (m <sup>3</sup> )	6 (0,01 negative pressure)
Weighing range (kg)	15 – 40
Weighing per hour (15-40) kg	550 – 500 sacks