

GRAIN CLEANING EQUIPMENTS

ANAMILLING



ASPIRATION CHANNEL MODEL: ACAC

Hava kanalı
Canal d'aspiration
Canal de aspiración


ASPIRATION CHANNEL - MODEL: ACAC



Aspiration channels are used to remove and clean light impurities and foreign materials from cereals by means of air. They can be used by the combination of either scourers (with vibro-motor) or separators (without vibro-motor).

Le canal d'aspiration est utilisé pour nettoyer du blé les grains légers, les particules étrangères et la poussière grâce à la circulation d'air.

Los Canales de aspiración se utilizan para eliminar impurezas y limpiar las impurezas livianas y materiales extraños de los cereales por medio de aire. Pueden ser utilizados por la combinación de cualquiera de las despuntadoras (con vibro-motor) o separadores (sin vibro-motor).

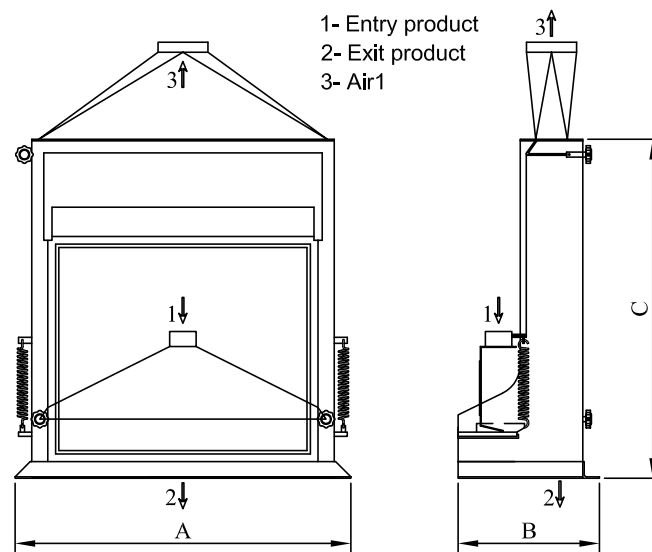

| MODEL | | ACAC-75 | ACAC-100 | ACAC-150 |
|-------------------|-----------------------|---------|----------|----------|
| Capacity | (t/h) | 4-6 | 12-25 | 25-60 |
| Air | (m ³ /min) | 35 | 45 | 110 |
| Dimension (mm) | A | 850 | 1100 | 1600 |
| | B | 520 | 520 | 600 |
| | C | 1450 | 1450 | 1450 |
| Weight | (kg) | 90 | 115 | 180 |

"The capacities for the machines and equipments shown in this catalogue are for wheat having 780 kg/m³ specific gravity and may vary depending on the specific gravity, humidity and foreign material contents of grain"